

Hog Heaven® Drainable Modular Tiles

Durable nitrile rubber

3/4"

13.4% @ 20 psi; 22.6% @ 40 psi

9.4 x 10⁵ ohms (50% humidity);
9.3 x 10⁵ ohms (12% humidity)

Yes

0.74 Dry, 0.77 Wet per ASTM C1028-96

Yes, tested up to 1800°F

Flammability DOC-FF-1-70: Pass

Prop 65 compliant

100% customer satisfaction guaranteed

VS.

Material

Thickness

Compression
Deflection

ESD Rating

Chemical/Oil Resistant


Coefficient of Friction

Welding Safe

Flammability

Prop 65

Warranty

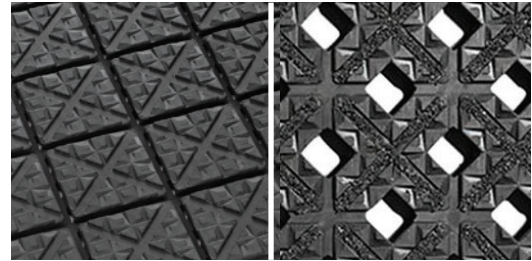

Ergonomic Drain Through Tiles

Durable nitrile rubber

3/4"

Unpublished

Static Dissipative 10⁹ ohms

Yes


0.965, 1.08 (with grit) per ASTM D1677

Yes, but no published high temperature

Flammability DOC-FF-1-70: Pass

Prop 65 warning

1-year warranty



18" - black borders		18" - yellow striped borders	
Tile/Size	Fastenal Part #	Tile/Size	Fastenal Part #
Center Tile: 18" x 18"	923446754	Center Tile: 18" x 18"	—
Side Tile: 18" x 21.875"	923446747	Side Tile: 18" x 21.875"	923446751
Corner Tile: 21.875" x 21.875"	923446748	Corner Tile: 21.875" x 21.875"	923446752

Available with black borders or yellow striped borders in sizes 18" and 36". Linkables and Workstations are also available, visit mamatting.com/fastenal or call your **M+A Matting Representative**.

